




Street-legal component approval certificate

for non-original motorcycle exhaust system

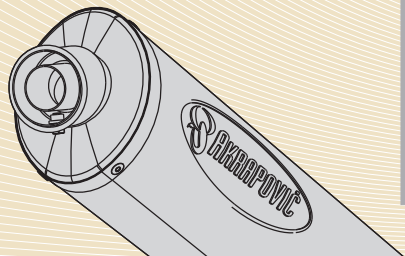

501160

Component approval No.:	e1*97/24*2003/77/9/III/28*0545*00
Issued by:	Kraftfahrt-Bundesamt, Office building, Fürdestraße 16, 24944 Flensburg, Germany
Place & date of type-approval:	Flensburg, 02.08.2005
Report No.:	363-0004-05-FBTK, extension 01
Issued by:	TÜV Automotive GmbH, TÜV SÜD Gruppe Engineering Center Garching D-85748 Garching
Date of issue:	14.11.2005
Approval identification:	e1 0545

Type and version of exhaust: M-H13, MS-H13, AM-H13

Technical unit: Technical unit, consisting out of one silencer M-H13, oval 98 × 128 mm, length 300 mm without end caps, absorption-reflection-principle with an outlet pipe ø 28 mm in combination with original header system.

Marking: Laser engraved on the endcap.

Field of application:

Manufacturer	Commercial description	Vehicle type (and no. of homologation)	Engine type	Year model	Component parts, dimensions in mm	Dimensions of the part in mm or original part / replacement part	Akrapovic part no.
Yamaha	TW 125	DE01 (K185)	E306E without cat.	99-05	Header pipe	Original part	
		DE05 (e1*0133*)			Link pipe		
					Silencer (inlet pipe ø 45 / outlet pipe ø 28)	Oval 98 × 128 Length without endcaps 300	M-H13 or MS-H13
Kymco	MXU 250	L6 (e4*0316*)	LB50 without cat.	2005	Header pipe	Oval 98 × 128 Length without endcaps 300	AH-KY2R1
					Silencer (inlet pipe ø 45 / outlet pipe ø 28)		AM-H13T or M-H13
	KXR 250	L3 (e4*0235*)	LA50 without cat.		Header pipe	AH-KY2R2	
					Silencer (inlet pipe ø 45 / outlet pipe ø 28)	Oval 98 × 128 Length without endcaps 300	AM-H13T or M-H13

To be filled out by Akrapovič representative:

Date of purchase: _____

Issued by: _____

Stamp & signature:

Muffler repack kit service intervals

The durability of the damping material depends on the type of motorcycle, riding style, mileage etc. Normally, single and twin cylinder engines produce a stronger exhaust gas wave pulse and a higher temperature. Often, riding on a race track requires noise limitation. The insulating material should be replaced when you notice any visual changes on the muffler sleeve material or when the muffler exceeds the noise limit. Please check the muffler visually before every season.

Date: _____

Date: _____

Performed by: _____

Performed by: _____

Stamp & signature: _____

Stamp & signature: _____

Date: _____

Date: _____

Performed by: _____

Performed by: _____

Stamp & signature: _____

Stamp & signature: _____

Date: _____

Date: _____

Performed by: _____

Performed by: _____

Stamp & signature: _____

Stamp & signature: _____

Maintenance

1. Clean titanium muffler outer sleeves with a multi-purpose spray lubricant (WD-40 or equivalent) and carbon-fiber outer sleeves with soft and dry cloth. Do not use aggressive chemical cleaners, because they can damage the sticker. A change in the color of the exhaust system is normal due to the high temperatures.

2. The wearing out of the muffler silencing material depends on the type of engine and riding style. Contact your dealer/serviceman if visible changes appear on the muffler outer sleeve or the noise level is increased.

3. Periodically make sure all the bolts are sufficiently tight.

Exclusion of Certain Liability

1. The manufacturer, importer or dealer shall not be liable for any incidental damage including personal injury or any other damages caused by improper installation or operation of the Akrapovič exhaust system. When installing the Akrapovič exhaust system be careful that the exhaust system does not touch other parts sensitive to high temperature.

2. Akrapovič makes no representation or warranties with regard to damage caused by the improper installation, use and maintenance of the Akrapovič exhaust system. The warranty is limited to defects recognized by our technical department and to normal use, and excludes items subject to normal wear (gaskets and damping wool). The guarantee is void in case of accident, modification, improper or competition use.

3. Do not attempt to install the Akrapovič exhaust system on a motorcycle for which it was not made or tested by Akrapovič.

4. When the exhaust system gets very hot during operation, be careful not to burn yourself on the exhaust system or parts which are in direct contact with it, even when the motor is not running. Also protect other people, especially children, from the injuries mentioned above.

5. In some cases Akrapovič exhaust system kits contain chemical products (ceramic anti-seizing grease). Handle with care, do not inhale or swallow. Avoid excessive contact with skin, eyes or mucous membranes. Keep out of the reach of children.

6. Technical specifications of Akrapovič exhaust systems and related products subject to change without notice.